



Spark Front & Rear Deck Washer Upgrade Kit

PART# RS4-130-WUK-2

We strongly recommend the use of a service manual to familiarize yourself with the various components and procedures involved with this installation. Please note that some of the original hardware removed in the disassembly process will be used in the installation process. These instructions have been written in step-by-step format and refer to illustrations. Read through instructions entirely before performing installation. Please follow these step-by-step instructions and illustrations carefully.

APPLICATION(S): Sea Doo Spark – 2up & 3up models

Required Specialty Tools

T30 Torx Bit

Part#

N/A

- INSTALLATION INSTRUCTIONS -


Remove self tapping Torx screws & plastic washers (16) from rear deck panel. (circled in illustration below)



Discard plastic washers. Reinstall Torx screws and upgraded washers in place of plastic washers. Torque to 5.5 Nm +/- 0.5 Nm. (49 inch lbs. +/- 4 inch lbs.)

Remove Torx screws (5) on the underside of the front bumper. Remove front bumper.

Remove Torx screws & plastic washers (12) from front deck panel. (circled in illustration)

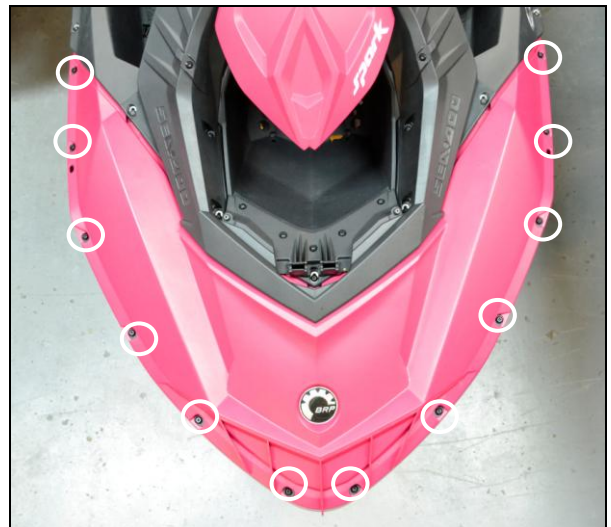

Discard plastic washers. Reinstall Torx screws and upgraded washers in place of plastic washers. Torque to 5.5 Nm +/- 0.5 Nm. (49 inch lbs. +/- 4 inch lbs.)

Reinstall front bumper & secure with Torx screws. (5) Torque to 5.5 Nm +/- 0.5 Nm. (49 inch lbs. +/- 4 inch lbs.)

The two console mounting bolts (circled in the illustration below) are secured from inside the hull with M6 elastic stop nuts.



The top main deck needs to be removed in order to access the M6 elastic nuts. When these bolts are removed, replace plastic washers with upgraded washers. Reinstall & torque bolts to 4.5 Nm +/- 0.5 Nm. (40 inch lbs. +/- 4 inch lbs.)

Installation is now complete.

Note: There is one extra washer supplied with this kit.

***Remember, the water belongs to everyone.
Please ride responsibly and respect the environment!***

Technical Support

For answers to questions regarding installation or trouble shooting RIVA Performance Products contact: RIVA Technical Support directly at (954) 247-0705 or by e-mail at tech_support@rivamotorsports.com.

Limited Warranty

RIVA Racing Hardware Kits carry a 90 day limited warranty to the original purchaser. They are warranted to be free of defects in materials and workmanship under normal use and service. Customer modified components will be void of warranty. This warranty is limited to defects in the primary components only. Finish and/or wear marks in or on primary components are not covered under this warranty.

RIVA Racing's liability is expressly limited to the repair or replacement of the components contained within or associated with this kit. RIVA Racing agrees to repair or at RIVA's option, replace any defective unit without charge, if product is returned to RIVA Racing freight prepaid within the warranty period. Any equipment returned which, in RIVA's opinion, has been subjected to misuse, abuse, overheating or accident shall not be covered by this warranty.

RIVA Racing shall have no liability for special, incidental or consequential damages or injury to persons or property from any cause arising from the sale, installation or use of this product.

No other warranty, express or implied, including, but not limited to the implied warranties of merchantability and fitness for a particular purpose, applies. Various states do not allow for the limitation of incidental or consequential damages and therefore the above exclusion or limitation may not apply to you.

Warranty does not include the expenses related to freight or transportation of parts or compensation for any inconvenience or loss of use while being repaired. A copy of the original invoice and a Return Authorization Number (RA#) must accompany all warranty claims.

Warranted replacement parts will be returned freight collect.