




RIVA RACING
PERFORMANCE PRODUCTS & ACCESSORIES

Yamaha EX Mirror Block Off Kit

RY5-EX-MB

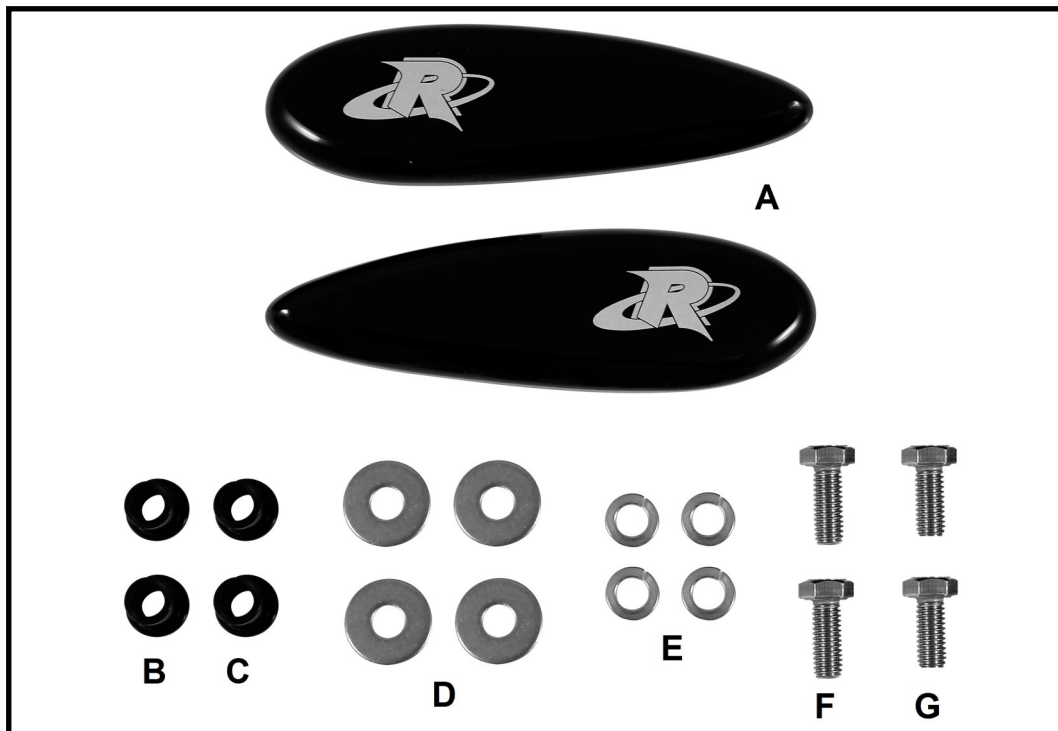

Applications: Yamaha EX Models 2017 -

Approximate Installation Time: 1 Hr.

Recommended Specialty Tools:

None

Part #

N/A

Required Materials:

Red Loctite

Part #

N/A

We strongly recommend the use of a service manual to familiarize yourself with the various components and procedures involved with this installation. Please note that some of the original hardware removed in the disassembly process will be used in the installation process. These instructions have been written in step-by-step format and refer to illustrations. Read through instructions entirely before performing installation. Please follow these step-by-step instructions and illustrations carefully.

***** ALLOW ENGINE TO COOL COMPLETELY BEFORE PERFORMING INSTALLATION *****

***** NO SMOKING *** NO SMOKING *** NO SMOKING *****



RIVA RACING
PERFORMANCE PRODUCTS & ACCESSORIES

Product name

COMPONENT LIST

		QUANTITY	PART NUMBER	DESCRIPTION
A	<input type="checkbox"/>	1		L and R Block Off Plates
B	<input type="checkbox"/>	2	QCA-RY5-EXMBSP	Long Spacer
C	<input type="checkbox"/>	2	QCA-RY5-EXMBSP	Short Spacer
D	<input type="checkbox"/>	4	410.6.18	6 mm Fender Washer
E	<input type="checkbox"/>	4	LMLW7X00600	6 mm Lock Washer
F	<input type="checkbox"/>	1	LMHC3X06020	6 x 20 mm SCHS
G	<input type="checkbox"/>	2	LMHC3X06016	6 x 16 mm SCHS

Packed with pride by: _____

Your kit was inspected and verified before being carefully packaged by our staff. Please check package contents before beginning assembly. If you have a question about missing or damaged items please contact RIVA Technical Support directly at (954) 247-0705 or by e-mail at tech_support@rivamotorsports.com

- INSTALLATION INSTRUCTIONS -

Remove seat.

Remove under seat storage trays (2).

Remove screws (2) holding L side panel. Remove L side panel. (Figure 1)

Figure 1



Repeat procedure for R side panel.

Open front storage compartment lid to fully open position. Pull lid directly away from ski to remove lid from plastic hinge. (Figure 2)



Figure 2

Press in on center pin of plastic rivets with screwdriver or similar object and remove plastic rivets and storage tray. **Note: Do not push too far or center pin will fall into storage compartment.** (Figure 3)

Figure 3




Remove bolts (6) holding front cover to ski. (Figures 4 and 5)

Figure 4




Figure 5

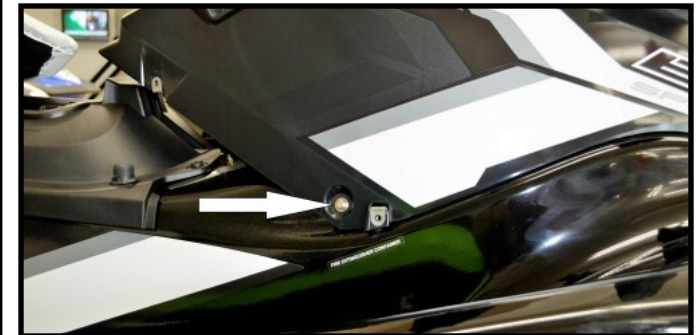

Remove bolts (6) holding steering cover. (Figure 6)


Figure 6

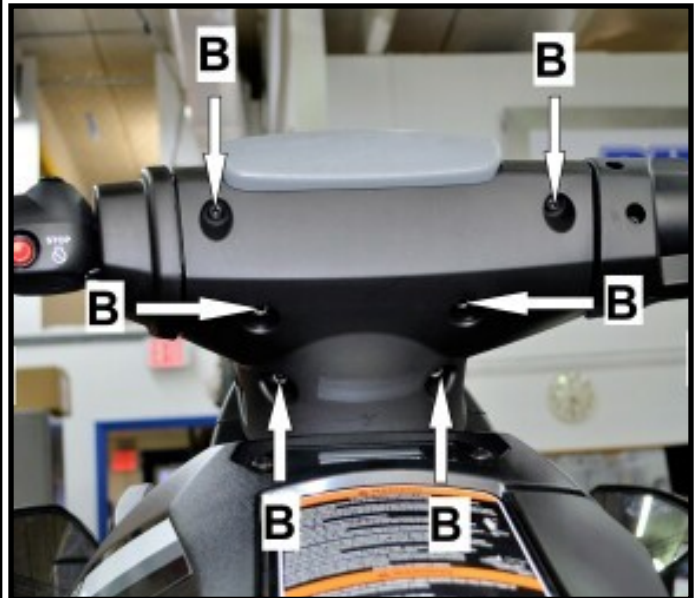

Release side catches and remove steering cover. (Figure 7)

- INSTALLATION INSTRUCTIONS -

Figure 7

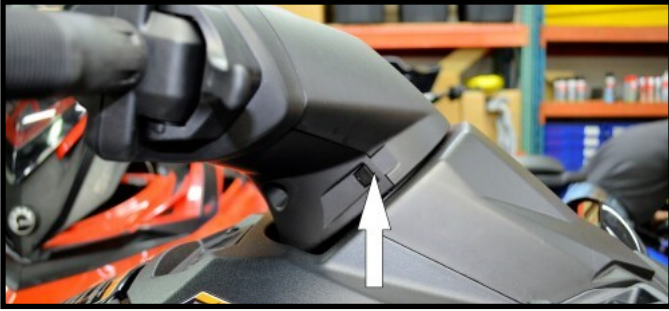

Push front upper cover up and back to release and remove from ski. (Figure 8)

Figure 8



Lift up the nose of the front cover and block it in place.
Tip: Use something soft, be careful not to scratch the ski.

Remove the nuts (4) two on each mirror and the plates, and remove mirrors. (Figure 9)

Figure 9



Remove rubber base from mirror. Two different length 6mm bolts are supplied with the block offs. The longer bolts (6x20 mm) and spacers go into the rear holes. The shorter bolts (6x16 mm) and spacers go into the front holes. Assemble each bolt with a lock washer followed by a fender washer and spacer. (Figure 10)

Figure 10



Install bolt assemblies through front cover and rubber mirror base into supplied mirror block off. **Note: longer bolts and spacers go into rear holes. Shorter bolts and spacers go into front holes. Apply red Loctite to bolts. Do not overtighten bolts.** (Figure 11)

Figure 11



Replace parts previously removed to access mirror bolts reversing removal procedure.

Check bilge for tools, rags, etc. Run craft on a flush kit to check for proper operation.

Remember, the water belongs to everyone.

Please ride responsibly and respect the environment!

Technical Support

For answers to questions regarding installation or trouble shooting RIVA Performance Products contact:

RIVA Technical Support directly at (954) 247-0705 or by e-mail at tech_support@rivamotorsports.com.

Limited Warranty

RIVA Steering Kits carry a 1 year limited warranty to the original purchaser. They are warranted to be free of defects in materials and workmanship under normal use and service. Customer modified components will be void of warranty. This warranty is limited to defects in the primary components only. Finish and/or wear marks in or on primary components are not covered under this warranty.

RIVA Racing's liability is expressly limited to the repair or replacement of the components contained within or associated with this kit. RIVA Racing agrees to repair or at RIVA's option, replace any defective unit without charge, if product is returned to RIVA Racing freight prepaid within the warranty period. Any equipment returned which, in RIVA's opinion, has been subjected to misuse, abuse, overheating or accident shall not be covered by this warranty.

RIVA Racing shall have no liability for special, incidental or consequential damages or injury to persons or property from any cause arising from the sale, installation or use of this product.

No other warranty, express or implied, including, but not limited to the implied warranties of merchantability and fitness for a particular purpose, applies. Various states do not allow for the limitation of incidental or consequential damages and therefore the above exclusion or limitation may not apply to you.

Warranty does not include the expenses related to freight or transportation of parts or compensation for any inconvenience or loss of use while being repaired. A copy of the original invoice and a Return Authorization Number (RA#) must accompany all warranty claims.

Warranted replacement parts will be returned freight collect.