



P/N# RY2717

RIVA GP Performance Trim Tab Kit

Applications: Late 98-99 GP760 / 800 / 1200 without OEM Trim Tabs.

NOTE: This kit is not designed for GP hulls originally equipped with OEM plastic tabs. Use RIVA P/N RY2718-B-1 (tabs) and RY2718-A (mounting kit) for this application.



Parts List

Qty.	Description
2	RIVA Trim Tab Backing Plates
1	RIVA Trim Tab Left Side
1	RIVA Trim Tab Right Side
6	Mounting Screws

Note: This is a racing component. It is designed for competition only. The Yamaha limited warranty or Riva Yamaha does not cover failures caused by this component

WARNING! DISCONNECT BATTERY AND TURN FUEL OFF BEFORE PERFORMING WORK.

1. Disconnect negative and positive leads from battery. Turn fuel off.
2. Remove waterbox, waterbox strap, battery box, exhaust through-hull outlet and hull foam to gain access to backing plate mounting area in hull.

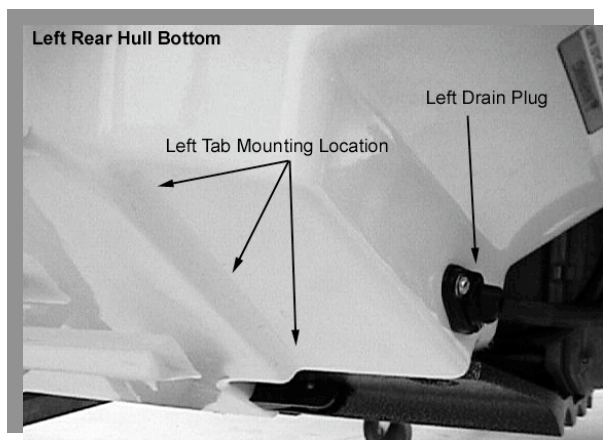


Illustration # 1

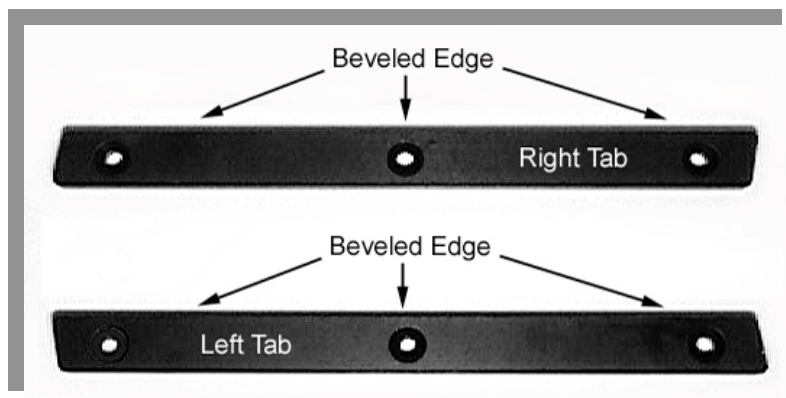


Illustration # 2

3. Position Left side tab, with beveled edge forward and against left hull bottom edge (Shown in Illustration #1 and 2). With left tab in position, using pencil, mark and drill holes using a 15/64" drill bit. Repeat this procedure for the right side using the right tab. Clean hull tab mounting areas outside and backing plate areas inside hull.

NOTE: It may be necessary to trim epoxy inside hull by ride plate inserts for proper mounting of tab backing plate.

4. Using structural adhesive or marine grade silicone* install one backing plate to each side (left and right inside hull area) of hull by positing in place over screw holes. Position each tab on outside of hull with countersunk holes facing down, beveled edge facing forward and insert each supplied screw through the tab, hull, and into the threaded holes in secured backing plate inside hull.
NOTE: Use silicone on surface of tab to prevent any water leaks and apply Loctite 242 to all supplied screws. **DO NOT OVER APPLY SILICONE OR TABS WILL NOT SIT FLUSH WITH HULL BOTTOM.**
5. Reinstall removed foam, exhaust through-hull outlet, battery box, waterbox strap, and water box.
6. Reattach positive and negative leads to battery and check for any hull leaks.

* Structural Adhesives recommend are; 3M Structural Adhesive Tube kit., 3M 5200 Adhesive Sealant, or Plio-grip 7770 (all available at RIVA Racing)

Technical Support

For answers to questions regarding installation or trouble shooting RIVA Performance Products contact:
RIVA Technical Support directly at (954) 247-0705 or by e-mail at
tech_support@rivamotorsports.com

RIVA Performance Tab Kit *Limited Warranty*

RIVA Racing warrants this RIVA Performance Tab Kit to the original purchaser to be free of defects in materials and workmanship under normal use and service for a period of 90 days from the date of original purchase by the end user.

RIVA Racing agrees to repair or at RIVA's option, replace any defective unit without charge, if product is returned to RIVA freight prepaid within the warranty period. Any equipment returned which RIVA's opinion has been subjected to misuse, abuse, corrosion or accident shall not be covered by this warranty. *Hardware, stripped threads, and broken fasteners are not covered by warranty.*

RIVA Racing shall have no liability for special, incidental, or consequential damages or injury to persons or property from any cause arising from the sale, installation, or use of this product.

No other warranty, express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose, applies. Various states do not allow for the limitation of incidental, or consequential damages and, therefor, the above exclusion or limitation may not apply to you.

Warranty does not include expenses related to freight or transportation of parts, or compensation for any inconvenience or loss of use while being repaired. A copy of the original invoice must accompany all warranty claims.
Warranted replacement parts will be returned freight collect.